



IJETMR

International Journal of Engineering Technologies and Management Research

A knowledge Repository



EXPERIMENTAL STUDY AND ANALYSIS OF PHOTOVOLTAIC ENERGY STORAGES SYSTEM WITH D.C.

Gausiya Sadaf Mansoori ^{*1}, Prof. Amir Ansari ²

^{*1} M. Tech student, Takshshila Institute of Engineering and Technology, Jabalpur (M.P.), INDIA

² Assistant Professor, Department of Electrical Engineering , Takshshila Institute of Engineering and Technology, Jabalpur (M.P.), INDIA

Abstract:

Photovoltaic cells power generations are increased, because of lack of electrical power. Using of uniform solar irradiation in the photovoltaic cells, power-voltage characteristics must be unique and the maximum power is generated from PV cells. The MPPT Device is an essential part for photovoltaic power generation system. Because of nonlinearity behavior of irradiation and temperature in atmosphere.

Keywords:

photovoltaic cells, energy storage system, D.C. convertor.

Cite This Article: Gausiya Sadaf Mansoori, and Prof. Amir Ansari, “EXPERIMENTAL STUDY AND ANALYSIS OF PHOTOVOLTAIC ENERGY STORAGES SYSTEM WITH D.C.” *International Journal of Engineering Technologies and Management Research*, Vol. 2, No. 5(2015): 6-10.

1. INTRODUCTION

The photovoltaic cell converts the light energy into electrical energy depending on the irradiation of the sun and temperature in the atmosphere. Basically PVC is a PN junction diode. But in PN junction diode DCI AC source is needed to work, but here light energy is used as a source to produce DC output. PVC is a current control source not a voltage control source.

The panel, containing multiple solar cell cores would be framed in metal and covered with clear glass and a backing support material. Let’s dissect the actual components used in a photovoltaic solar cell from top to bottom. Antireflective Coatings are used to help avoid the incoming sunlight from being reflected back off the solar cell. Only by capturing and absorbing as much of the incoming sunlight as possible can a solar cell maximize its electricity generating capacity. Since only spectral solar light is processed during the photovoltaic effect, the antireflective coating helps increase absorption over the entire solar spectrum and aides in the absorption of sunlight when the cells aren’t oriented to optimum sun angles.

2. EXPERIMENTAL PROCESS

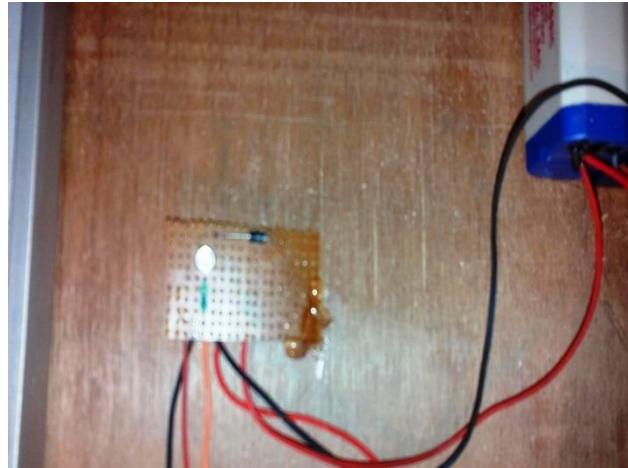


Figure 1: Battery with LED



Figure 2: D.C. Converter

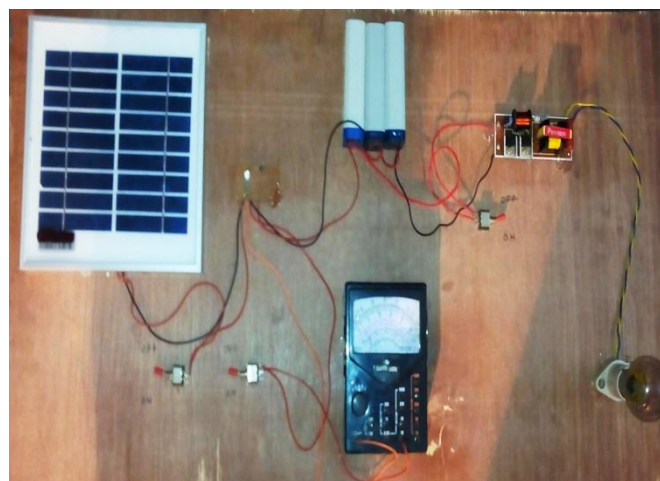


Figure 3: Experimental Setup

3. PERFORMANCE TESTING

Table 1: Voltage with respect to time

Sr.No.	Time	Voltage
1	10:00	7
2	11:00	11
3	12:00	13
4	13:00	18
5	14:00	16
6	15:00	12
7	16:00	10

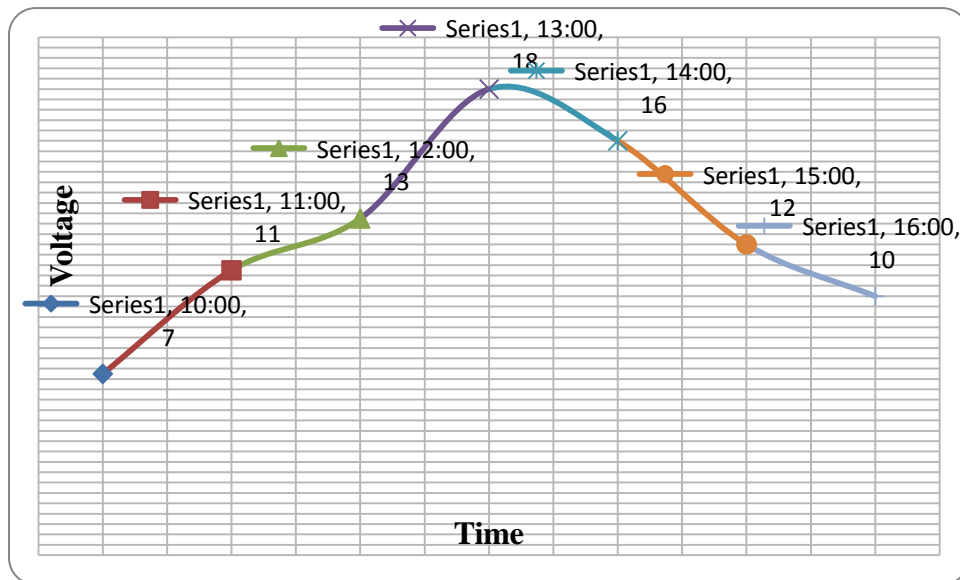


Figure 4: Voltage with respect to time

Table2: Voltage with respect to time using of Maximum Power Point tracking system

Sr.No.	Time	Voltage
1	10:00	10
2	11:00	13
3	12:00	14
4	13:00	20
5	14:00	15
6	15:00	11
7	16:00	9

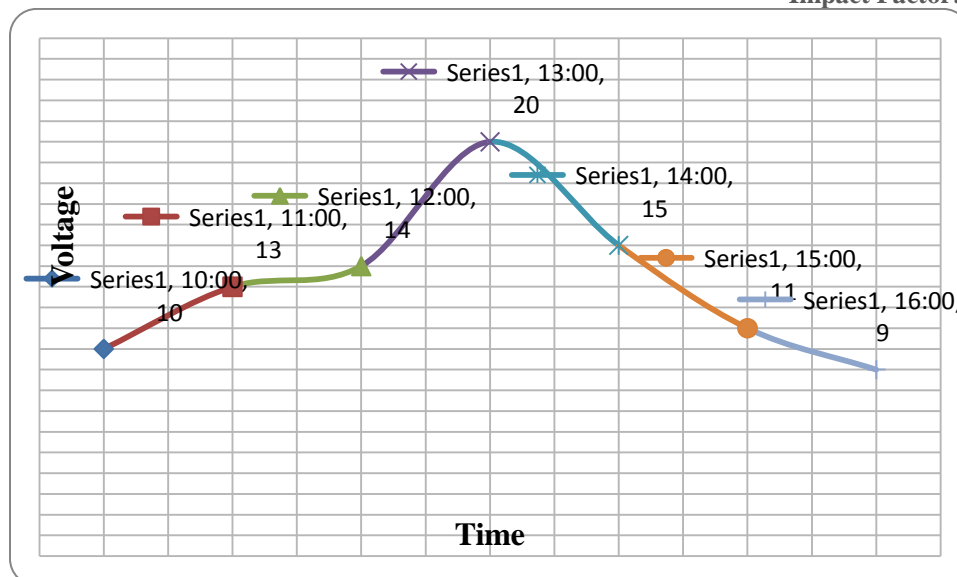


Figure 5: Voltage with respect to time using of Maximum Power Point tracking system

4. CONCLUSION

In this paper, a Maximum Power Point tracking system based Experimental setup are designed and constructed by experimental process. We are find out the D.C. power by photovoltaic cells, the Maximum output voltage are 20 V. D.C. At the time 13:00, which are shown in Table.2. , output voltages are used for other devices. Solar cells voltages are change during various time periods due the change of insolation levels and temperature.

5. REFERENCE

- [1] C. Nayar, and L. Borle, "A combined voltage controlled and current controlled "Dual Converter" for a weak grid connected photovoltaic system with battery energy storage," in *Proc. 33rd IEEE Power Electron. Spec. Conf.*, 2002, pp. 1495–1500.
- [2] H. Serban, "A control strategy for a distributed power generation microgrid application with voltage and current-controlled source converter," *IEEE Trans. Power Electron.*, vol. 25, no. 12, pp. 2981–2992, Dec. 2010.
- [3] N. Soltan, S. Thomas, and R. W. D. Doncker, "The balance of renewable sources and user demands in grids: Power electronics for modular battery energy storage systems," *IEEE Trans. Power Electron.*, vol. 25, no. 12, pp. 3049–3056, Dec. 2010.
- [4] Y. Miura, and T. Ise, "Low-voltage bipolar-type DC microgrid for super high quality distribution," *IEEE Trans. Power Electron.*, vol. 25, no. 12, pp. 3066–3075, Dec. 2010.
- [5] T. Bhattacharya, D. Tran, T. S. T. Siew, and A. M. Khambadkone, "Composite energy storage system involving battery and ultracapacitor with dynamic energy management in microgrid application," *IEEE Trans. Power Electron.*, vol. 26, no. 3, pp. 923–930, Mar. 2011.
- [6] J. V. Paatero and P. D. Lund, "Impacts of energy storage in distribution grids with high penetration of photovoltaic power," *Int. J. Distributed Energy Resources*, vol. 3, no. 1, pp. 31–45, 2007.

- [7] Y. Ueda, K. Kurokawa, T. Itou, K. Kitamura, K. Akanuma, M. Yokota, H. Sugihara, and A. Morimoto, "Performance analyses of battery integrated grid-connected residential PV systems," in *Proc. 21st Eur. Photovolt. Sol. Energy Conf.*, 2006, pp. 2580–2584.